

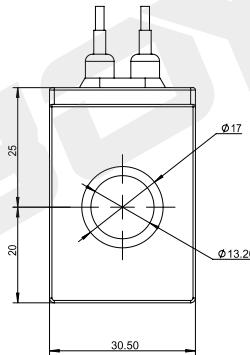


## Coil for cartridge valve

### BYC04-13-01L

**DC 24V  
AC 220V**

Other can be customized



BYC


120

#### technical parameter

Ambienttemperature	°C	-25 ~ 50	Degree of protection		IP67
Voltage fluctuation range	%	85 ~ 110	Power on duration	%	100
Rated power	W	18	Insulation class		H (180)

**DC 12V  
DC 24V**

Other can be customized



TEL:+86-574-86587131

[www.nbboye.net](http://www.nbboye.net)

#### technical parameter

Ambienttemperature	°C	-25 ~ 50	Degree of protection		IP67
Voltage fluctuation range	%	85 ~ 110	Power on duration	%	100
Rated power	W	18	Insulation class		H (180)

The sample data comes from the laboratory environment and is only for reference. If your company needs the latest data or has special needs, please contact Boye hydraulic engineer.