

BYS02-25A-01L

电磁阀锁

battery valve lock

DC 12V


DC 24V

其它规格可定做

Other can be customized


- 适用于电磁阀位置锁定
- 自带复位弹簧
- 线圈全塑封工艺

- Suitable for solenoid valve position locking
- Comes with return spring
- Coil full plastic sealing process

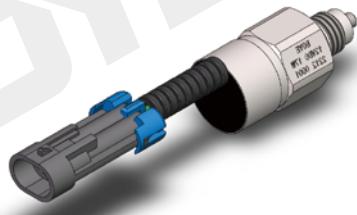

外形及连接尺寸

Outline and connection dimensions

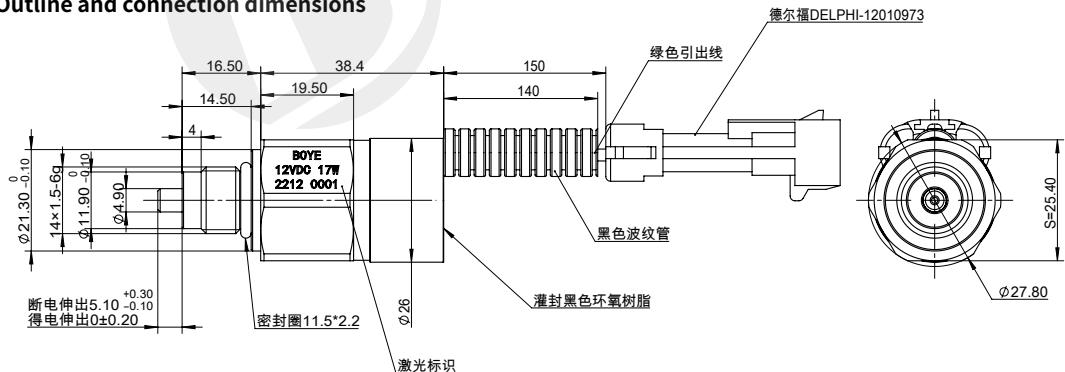

技术参数 /technical parameter

Технические характеристики

环境温度 Ambient temperature Temperatura окружающей среды	°C	-25~50
额定电压 Rated voltage Номинальное напряжение	VDC	12
额定电阻 Rated resistance Номинальное сопротивление	Ω	15.5
额定行程 Rated stroke Номинальный ход	mm	5
重复精度 Repetition accuracy Точность повторения	%	≤ 1
防护等级 Degree of protection Степень защиты		IP67
通电持续率 Power on duration Длительность включения	%	100
绝缘等级 Insulation class Класс изоляции		H (180)
电气连接方式 Electrical connection mode Режим электрического подключения		双引线

注意事项

matters needing attention

1. 线圈不得单独通电使用，有烧损风险！
2. 非防爆线圈，不得使用在有爆炸危险的介质中！
3. 线圈安装后，必须接地可靠，否则有触电危险！

1. The coil shall not be powered on alone, which has the risk of burning!
2. Non explosion-proof coil shall not be used in medium with explosion risk!
3. After the coil is installed, it must be grounded reliably, otherwise there is a risk of electric shock !